


# AHARD EP BOLDPAINT/OP

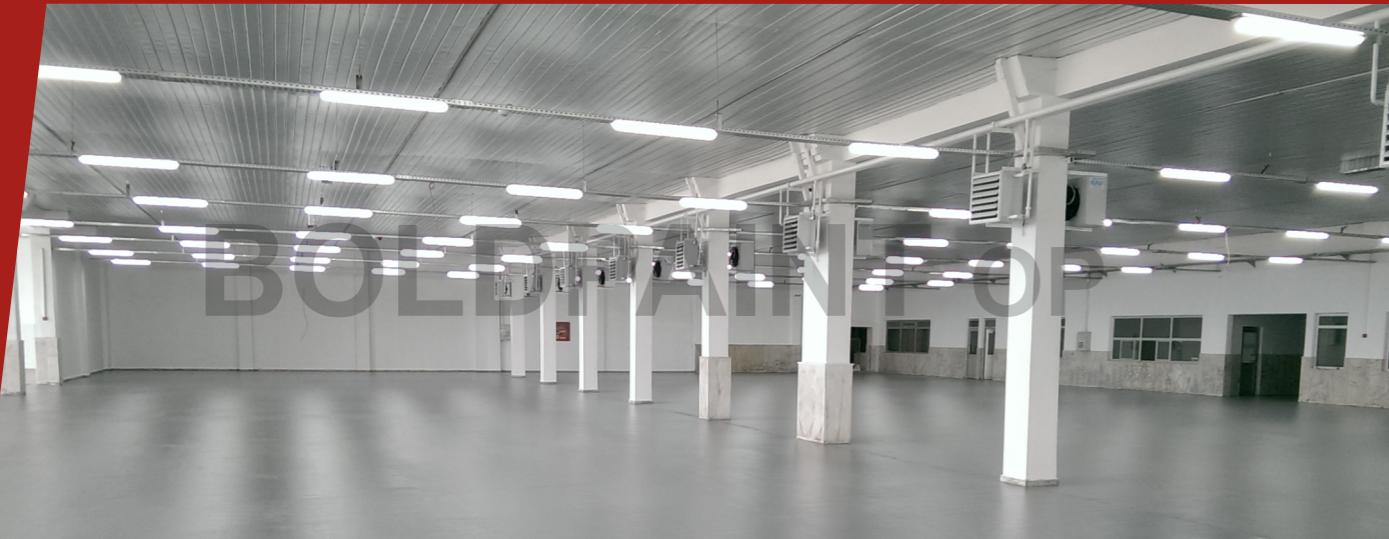

INDOOR PARKING AREAS - KITCHEN - OFFICE - FOOD MANUFACTURING AREAS  
LIGHT LOAD STORAGE - LIGHT MANUFACTURING AREAS exc.


## AHARD EP BOLDPAINT/OP

It is light service surface coating system in which grained epoxy thick paint used as main material. It is epoxy based, it makes surface as orange zest, it has high density and it is very strength surface. It is very preferred system because it is so economical, decorative and easy renewable. Because of its orange zest pattern, it prevents sliding. This system is especially suitable for parking areas, it stops sliding problem. This surface, provided by EP grained paint, can be easily renewed for colour change and esthetical corrections. New surface can be provided with very low budget by applying Epoxy paints in RAL colours to needed surface. Logos, road lines, signs can be applied onto surface.



AHARD EP  
BOLDPAINT

# AHARD EP boldpaint TDS

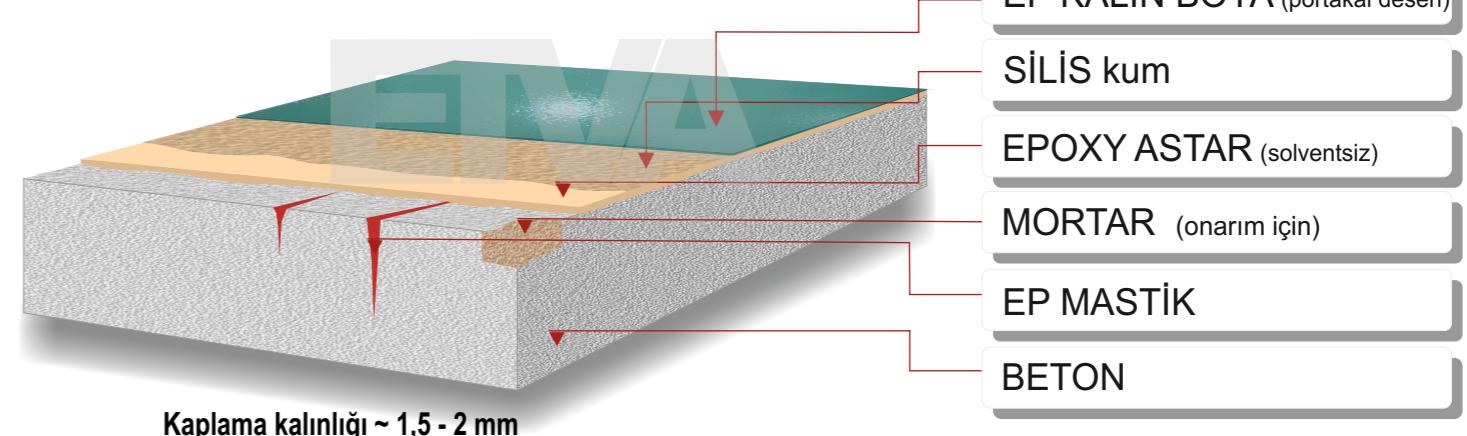

- EP KALIN BOYA (portakal desen)
- SİLİS kum
- EPOXY ASTAR (solventsiz)
- MORTAR (onarım için)
- EP MASTİK
- BETON

AHARD EP-BOLDPAINT sistem ürünleri ve kullanım miktarları

| Malzeme                     | ! Kullanım miktarı      | Malzeme özelliği                         |
|-----------------------------|-------------------------|--|
| 1) Epoxy mastik veya mortar | *0,00 kg/m <sup>2</sup> | EP dolgu macunu (mastik) - mortar        |
| 2) Epoxy astar (reçine)     | 4,00 kg/m <sup>2</sup>  | EP sovlentsiz kalın astar.               |
| 3) Silis kum                | 2,00kg/m <sup>2</sup>   | Maden ürünü yılanmış elenmiş silis kumu. |
| 4) EP Grenli Kalın boyası   | 0,80 kg/m <sup>2</sup>  | EP (portakal kabuğu) desenli boyası.     |

*! Tabloda yer alan miktarlar; uygulama yapılacak zeminin ideal kalitede ve düzükte olduğu varsayılarak hesaplanmıştır.  
Bozuk, hasarlı veya kot farklı alanlarda bu miktarlar değişebilir.*

*\* Kullanım miktarı belirtilmemiştir. Zemindeki hasar ve çatıtlaklara göre belirlenir.*



Tüm RAL renklerinde uygulanabilir.

